

Before start ,please carefully read the explanations!

Zero Fighter 52#



Specification:

Wing Span: 2362mm/93in

Length: 1916mm/75.4in

Flying Weight: 12.3kg

Wing area: 93.7dm²

Engine: 60-80cc

R/C System: 8+ channel radio system

Servo: 10

C.G: 145mm back from the leading edge at wing root

INSTRUCTION MANUAL



SAFETY PRECAUTIONS

This R/C airplane is not a toy!

(The people under 18 years old is forbidden from flying this model)

First-time builders should seek advice from people having building experience.If misused or abused,it can cause serious bodily injury and damage to property.

Fly only in open areas and preferably at a dedicated R/C flying site. We suggest having a qualified instructor carefully inspect your airplane before its first flight.Please carefully read and follow all instructions included with this airplane,your radio control system and any other components purchased separately.

REQUIRED FOR OPERATION (Purchase separately!)



CAUTION: For details concerning the equipment listed below (size, maker, etc.), check with your hobby shop.

1 A minimum 6 channel radio for airplanes (with 8 servos), and dry batteries.




CAUTION: Only use a minimum 6 channel radio for airplanes! (No other radio may be used!)

6 channel radio for aiplane is highly recommended for this model.

12 AA-size Batteries



A minimum 6 channel transmitter for airplanes.




For handling the radio properly, refer to its instruction manual.

2

Engine and Muffler

Model Airplane Engine 35cc gas engine

Muffler



3

Propeller Spinner



4.1 in scale spinner

Purchase a propeller that will match your engine.


Engine 22"X10



Motor 24"X10




Motor: 12S 5000MAH 180KV
High Voltage ESC 130A

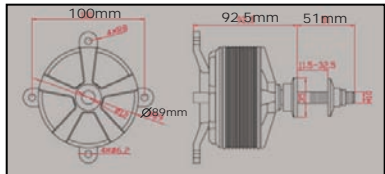

4


Sponge Sheet



Gasoline tube



Fuel Filter




5

Required for engine starting:



WARNING: Normal gasoline cannot be used with glow engines.

Gasoline



Fuel Pump




Booster Cord



4 D-size Batteries



Plug Wrench



6

Glue

Instant Glue




Epoxy Glue




7

Other equipment for enhancing airplane operation & performance

Engine Starter



12V Battery (for starter)



9

Optional electric retract set



TOOLS REQUIRED (Purchase separately!)

Sharp Hobby Knife




Phillips Screw Driver (l, m, s)




Awl




Needle Nose Pliers



Wire Cutters



Scissors



BEFORE YOU BEGIN

1

Read through the manual before you begin, so you will have an overall idea of what to do.

2

Check all parts. If you find any defective or missing parts, contact your local dealer.

3

Symbols used throughout this instruction manual, comprise:

4

We strongly recommen you use the thread lock for all the screws when you build your model.



Apply epoxy glue.



Drill holes with the specified diameter (2mm).



Cut off excess.



Pay close attention here!



Assemble left and right sides the same way.



Apply instant glue (CA glue, super glue).



Cut off shade portion.



Ensure smooth non-binding movement while assembling.



Must be purchased separately!

Do not overlook this Symbol!




Warning!

Electric retract system

Thank you very much for purchasing our TRCM optional electric retract set, all our products were passed strict QC before they shipped out to the customers. In order to avoid probably trouble happen, we still would like you to follow the steps below before you assemble our electric retracts to your plane.

1. Connecting the circuit board to the battery and receiver.

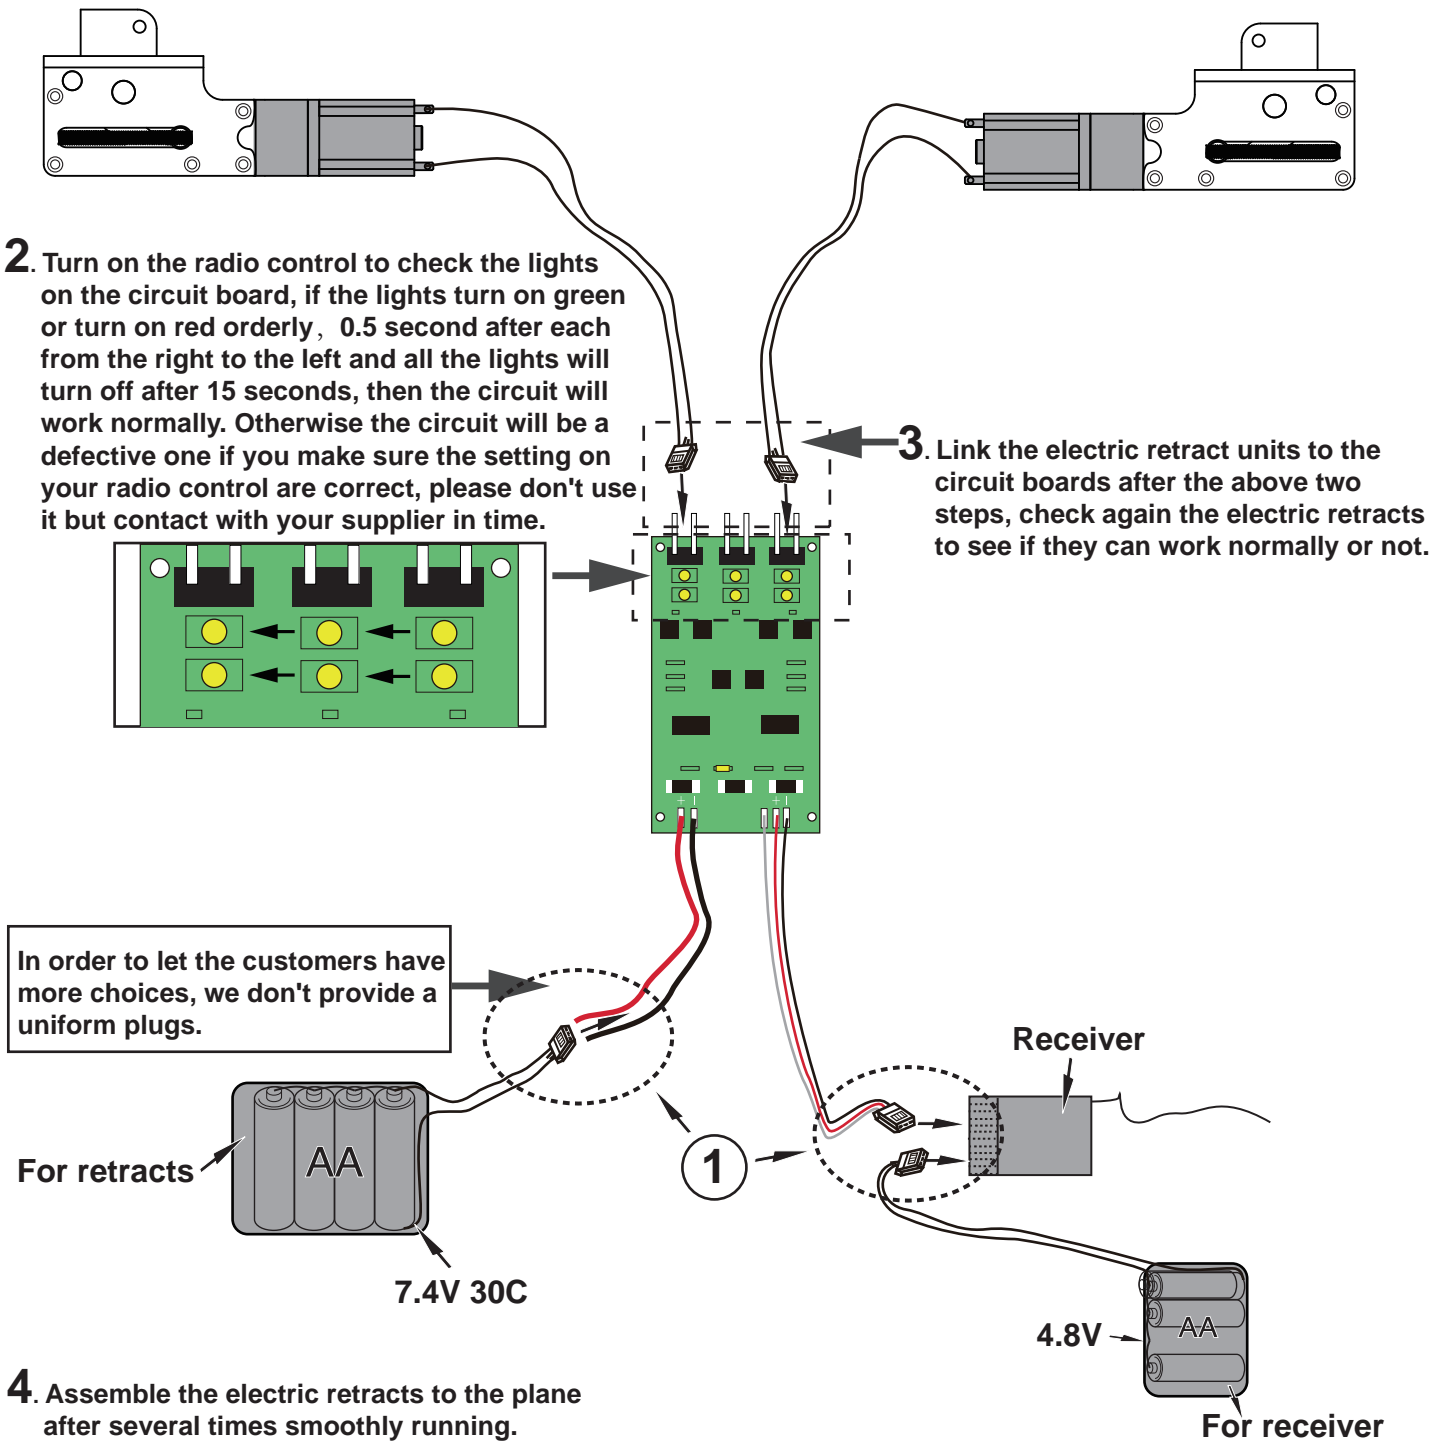

Accessory list for the coming installation steps.

Horn	4	Screw (3x6mm)	8
Horn	4	L bracket	8
Pivot & round hinge(5x68mm)	8	Screw (3x10mm)	16
Pin hinge(24x24mm)	6	Servo tray(68.5x56.5x2mm)	4
Clevis (2mm)	8	Main wing joiner(30x415mm)	2
Push rod (115x2mm)	2	Main wing joiner(20x227mm)	2
Push rod (138x2mm)	2	TP Screw (2.3x12mm)	16
Screw (2x12mm)	8		
Locknut (2mm)	8		


1

Apply instand type AB glue to the holes in the ailerons, flaps and hinges.




2

Keep some space about 1mm width between the trailing edge and the aileron.

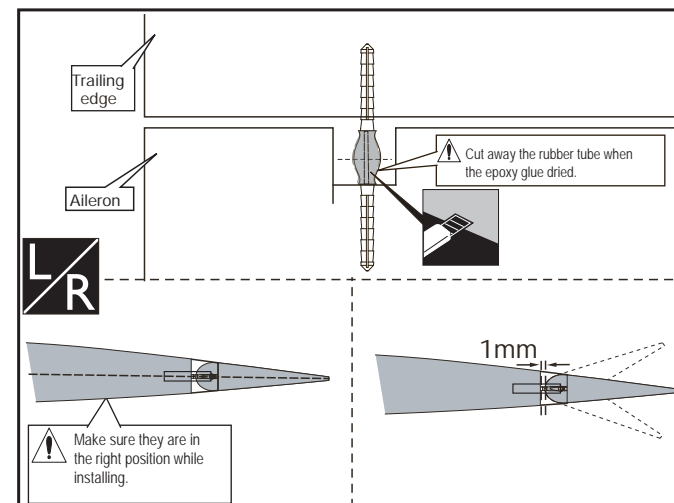


3

Keep some space about 1mm width between trailing edge and flap.

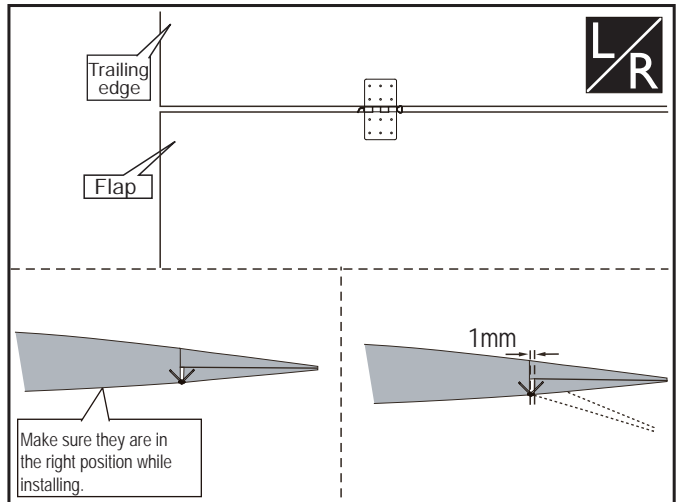


4

Install the L brackets to the servo of ailerons and flaps as illustration below.

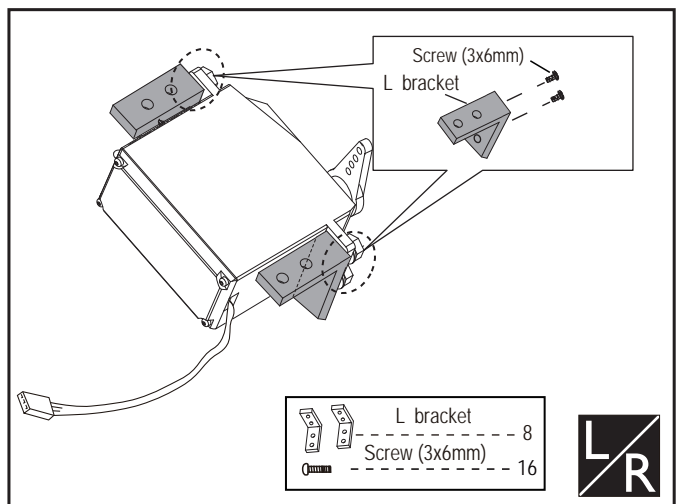

5

Install the nylon control horn and connect the linkage.

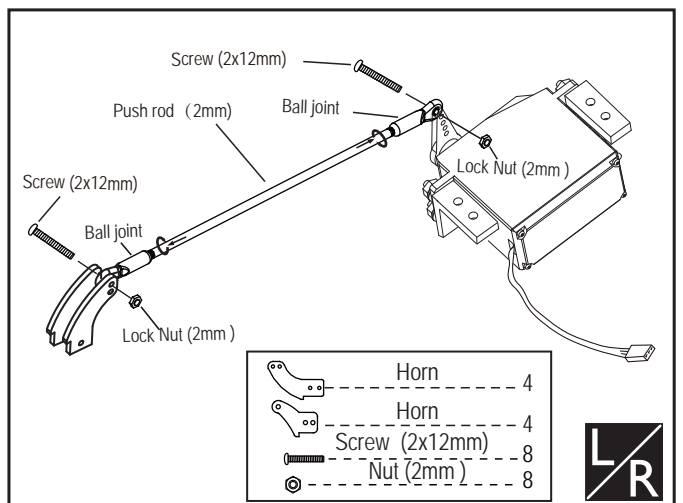

Apply epoxy glue.



Apply instant glue (CA glue, super glue).



Assemble left and right sides the same way.



Ensure smooth non-binding movement while assembling.



Pay close attention here!




Cut off shaded portion.

Do not overlook this symbol!



6

Assemble the servo to the wing with screws.

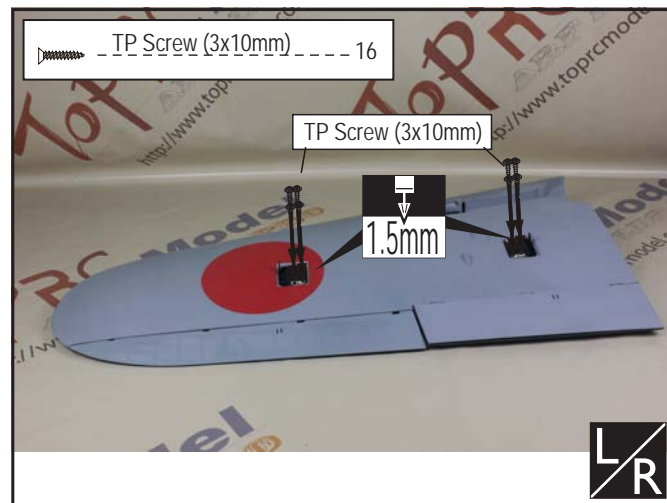


Accessory list for the coming installation steps.

	Gear door	1
	Screw (6x50mm)	2
	Clevis	2
	Horn	2
	Retainer	2
	Rod (2mm)	2
	Screw (2x12mm)	2
	Nut (2mm)	2
	Pin hinge(24x24mm)	4
	Screw (2x10mm)	20
	Screw (3x6mm)	8
	TP Screw (3x20mm)	8
	Washer(3x6mm)	8


7

Epoxy the fiber horns to the ailerons and flaps, secure the servos. Install the nylon control horn and connect the linkage.

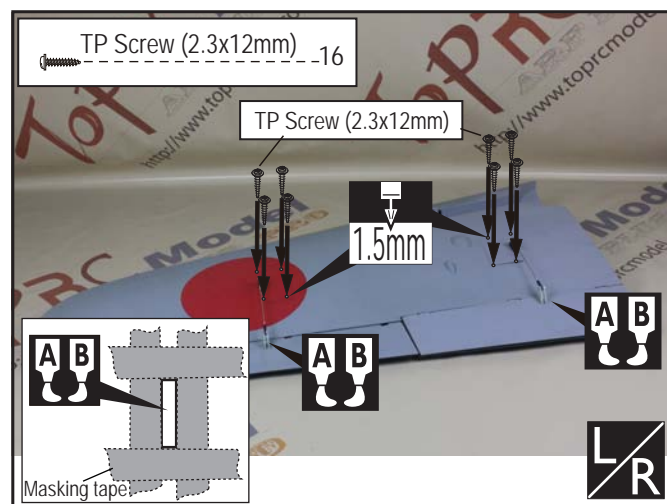


9

The sketch map of the landing gear and landing gear door.

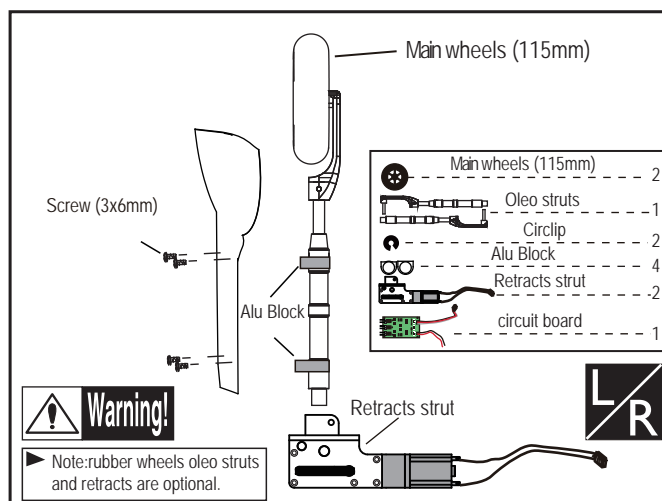


8

Assemble the wing tubes to the wing and drag the servo lines out from the hole as illustration.

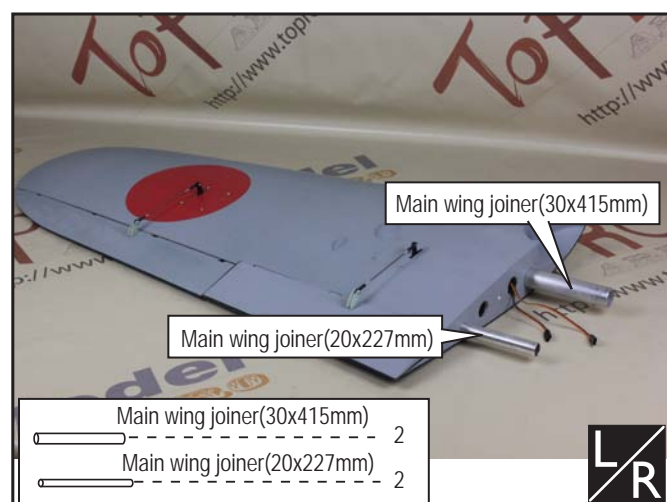

10

Assemble the landing gear to the appropriate position in the landing gear mount and install the wing to the fuselage.

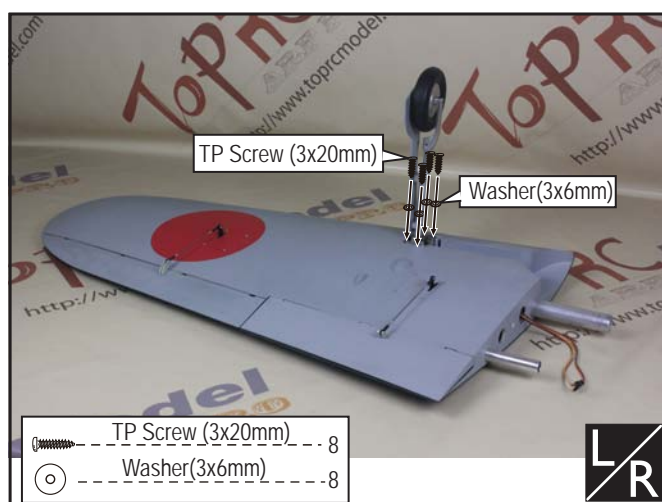

Accessories packing list

	TP Screw (2.3x8mm)	28
	TP Screw (2.3x12mm)	26
	TP Screw (3x30mm)	6
	Screw (2x10mm)	4
	Screw (3x10mm)	20
	Screw (2x10mm)	16
	Screw (3x6mm)	16
	Screw (3x12mm)	19
	Screw (3x15mm)	3
	Locknut (2mm)	19
	Washer(3x8mm)	19
	Copper joiner	4
	Aluminum tube	4
	Linkage Stopper	2
	L bracket	8
	Scale exhaust tubes	7
	Push rod (2x115mm)	2
	Push rod (2x138mm)	2
	Push rod (2x70mm)	2
	Rod (2mm)	1
	Rod (2mm)	1
	Plastic tube (2x650mm)	1
	Steel wire (0.5x3000mm)	4
	Rudder steering arm(3mm)	1
	Horn(2mm)	4
	Horn(2mm)	8
	Horn	2
	Retainer	3
	Clevis	19
	pivot & round hinge(5x68mm)	19
	Pin hinge(24x24mm)	10
	Screw (6x50mm)	2
	Servo tray(2mm)	4
	Ply plate (6mm)	1
	Ply plate (3mm)	1
	Exhaust template (3mm)	1
	Cowling Wooden Frame	1

	Gear door A	1
	Gear door B	1
	Antenna	1
	Drop tank	1
	Canopy (PVC)A	1
	Canopy (PVC)B	1
	Canopy (PVC)C	1
	Main wing joiner(30x415mm)	2
	Main wing joiner(20x227mm)	2
	carbon fiber tube(12x480mm)	2
	Fuel tank (800cc)	1

Purchased separately

	Tail landing gear	1
	Main wheels (100mm)	2
	Oleo struts	1
	Circlip	2
	Alu Block	4
	Retracts strut	2
	circuit board	1
	TP Screw (3x20mm)	8
	Washer(3x6mm)	8



Apply epoxy glue.



Assemble left and right sides the same way.



Pay close attention here!



Apply instant glue (CA glue, super glue).



Ensure smooth non-binding movement while assembling.




Cut off shaded portion.

Do not overlook this symbol!




50 Assemble the clear canopy to the cockpit with AC glue and fix the antenna to the cockpit with screw.

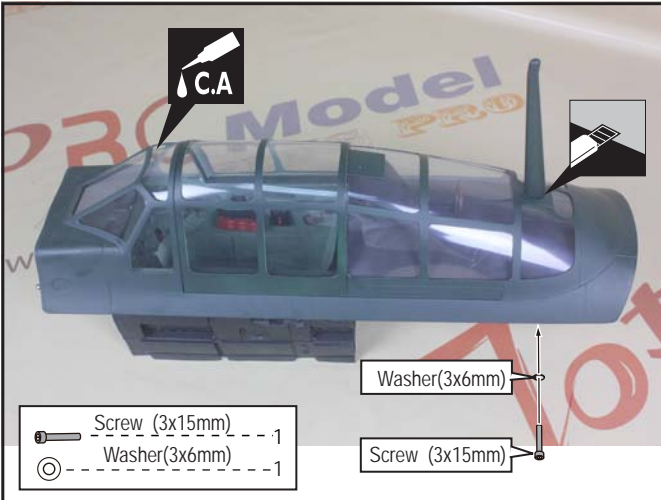

51 Assemble the entire cockpit to the fuselage.



52 Adjustment.

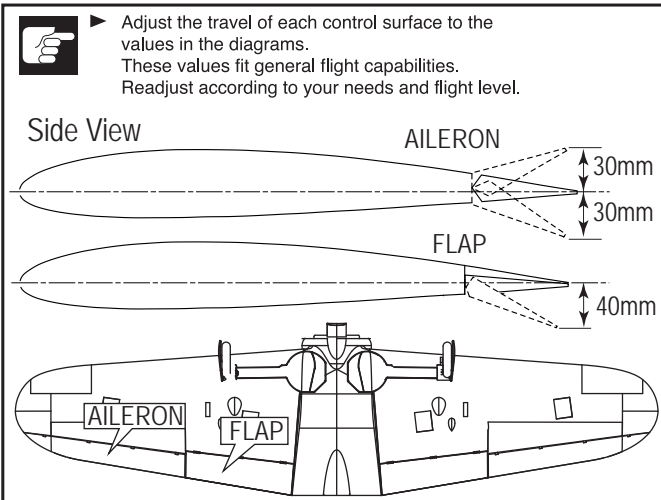


AB Apply epoxy glue.

CA Apply instant glue (CA glue, super glue).


L/R Assemble left and right sides the same way.

o Ensure smooth non-binding movement while assembling.


53 Adjustment.

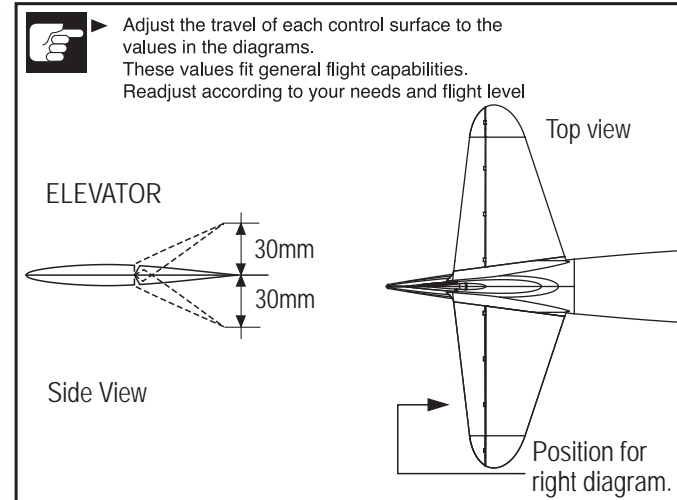

54 Adjustment.

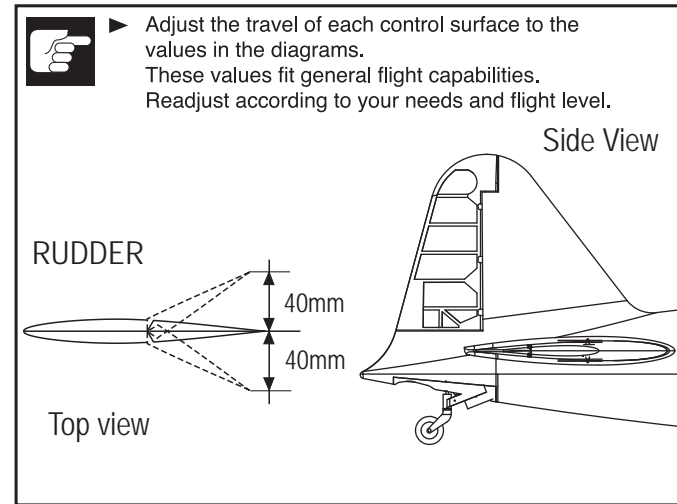

55 The centre of the Gravity.

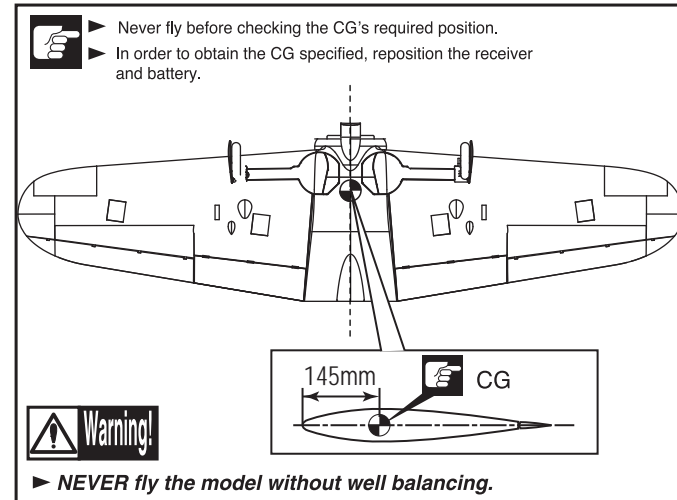


o Pay close attention here!

o Cut off shaded portion.


Do not overlook this symbol!

Warning!

11 The sketch map should be when the wing assembly completion.

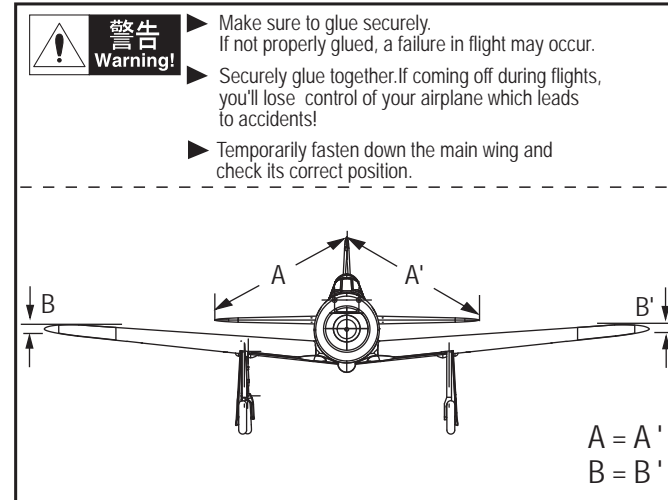

12 Drill holes to the landing gear doors and assemble them to the landing gears with screws.

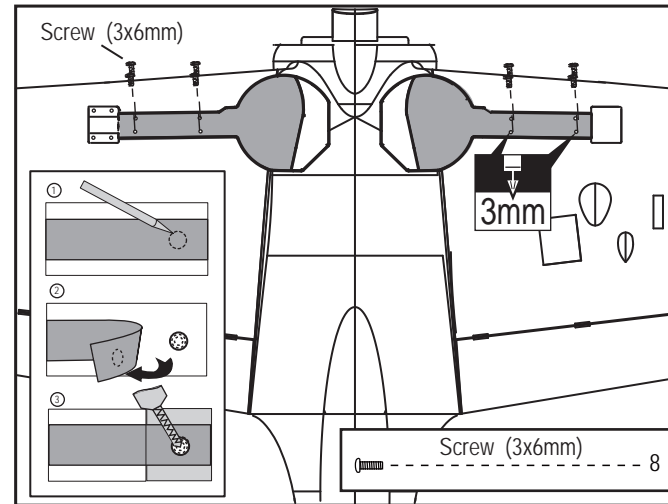

13 The sketch map when the gear get down.




AB Apply epoxy glue.

CA Apply instant glue (CA glue, super glue).


L/R Assemble left and right sides the same way.

o Ensure smooth non-binding movement while assembling.


14 Factory already set blind nuts in the wings, the customers can fix the wing to the fuselage by tightening the nylon screws.

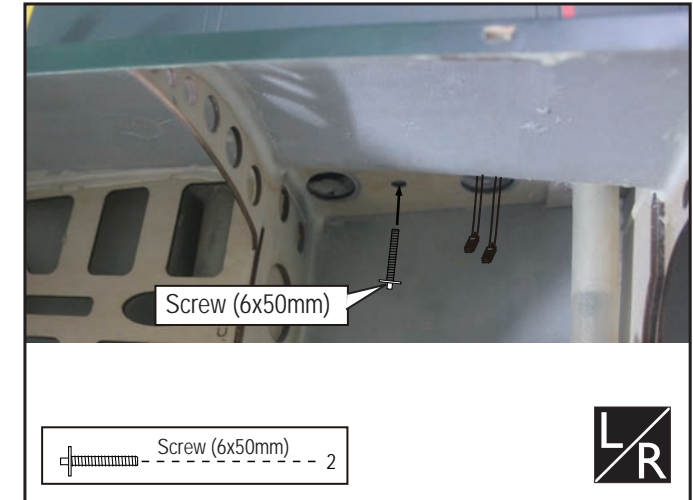

15 Epoxy the pinned hinges, horns to the inner gear door carefully, drill holes through the gear door and pinned hinges and fix the pinned hinges tightly to the inner gear door.

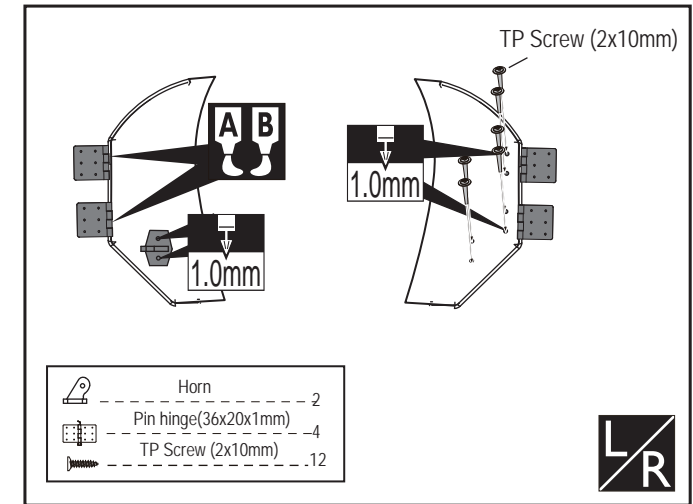

16 Assemble the inner gear doors to the fuselage with screws and epoxy, connect the horn on the inner gear door to the servo with push rod.

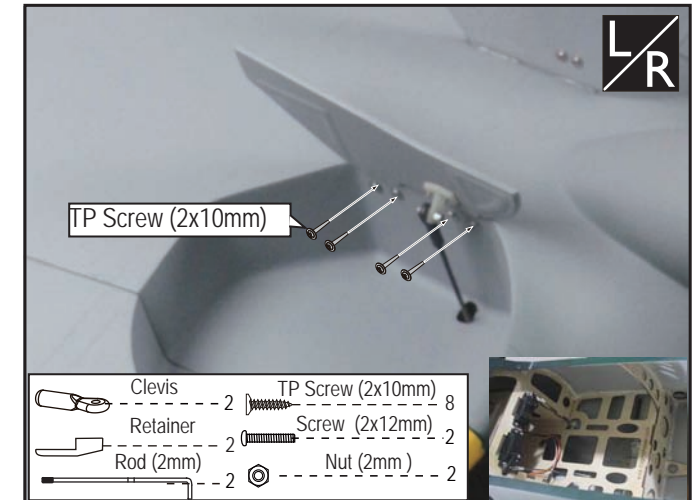

o Pay close attention here!

o Cut off shaded portion.

Do not overlook this symbol!

Warning!




Accessory list for the coming installation steps.

	Horn	4
	pivot & round hinge(5x68mm)	8
	Clevis	4
	Push rod(70x2mm)	2
	Screw (2x12mm)	4
	Lock Nut (2mm)	4
	Washer(3x8mm)	4
	Screw (2.6x12mm)	4
	Carbon fiber stab bolt tube(12x480mm)	2


17

Apply instand type AB glue to the holes in the stabilizer and hinges.

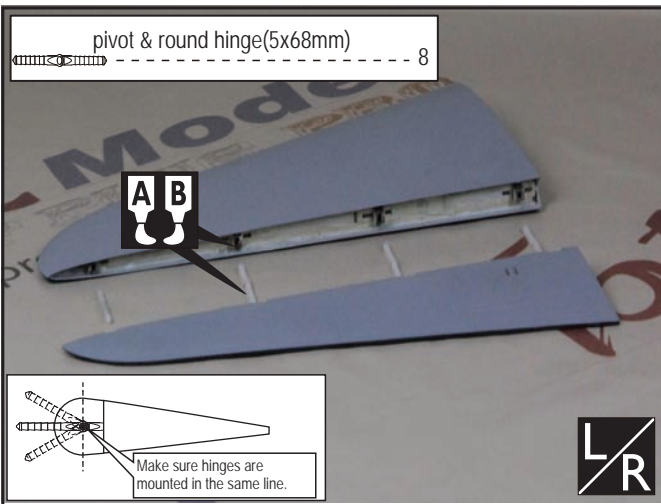

18

Keep some space about 1mm width between elevator and tailing edge.

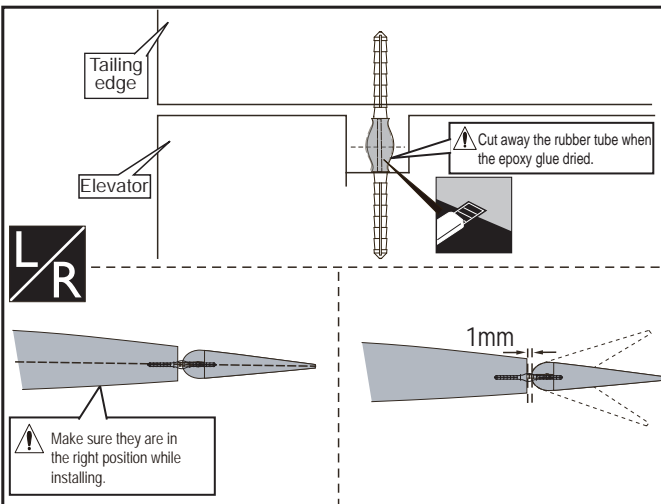

Apply epoxy glue.



Apply instant glue (CA glue, super glue).




Assemble left and right sides the same way.



Ensure smooth non-binding movement while assembling.


19

Epoxy the elevator to the stabilizer.

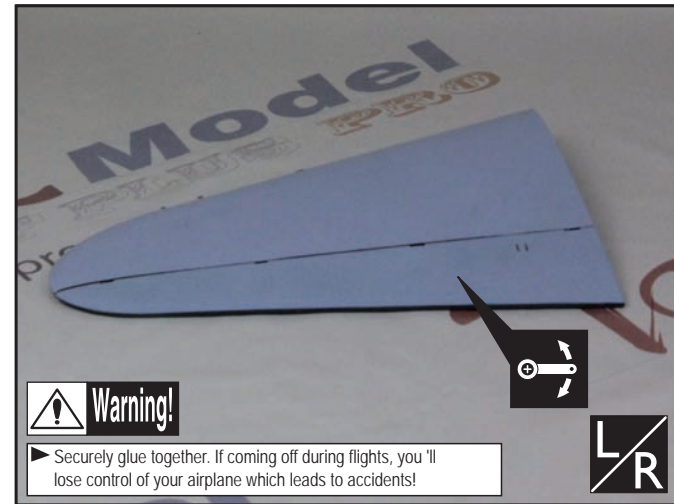

20

Install the control horn and connect the linkage.

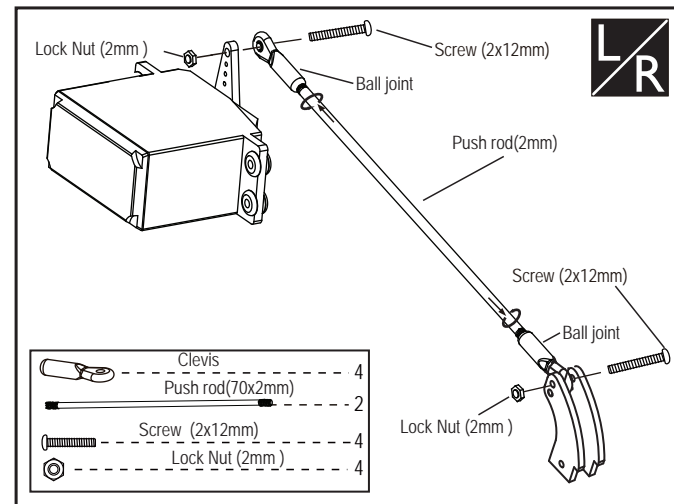


21

The steps to assemble the servo for elevator.



44

Steps for assembling the drop tank.Factory already set blind nuts in the drop tank.

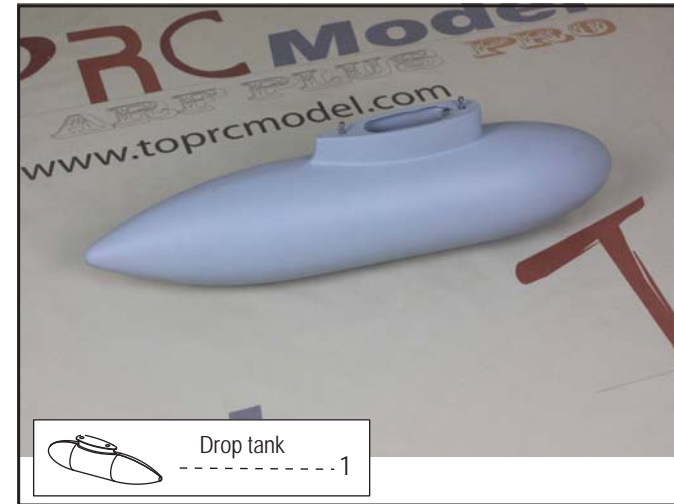


45

Put the drop tank to the belly of fuselage.



46

Fix the drop tank by screws from the inner fuselage as illustration.

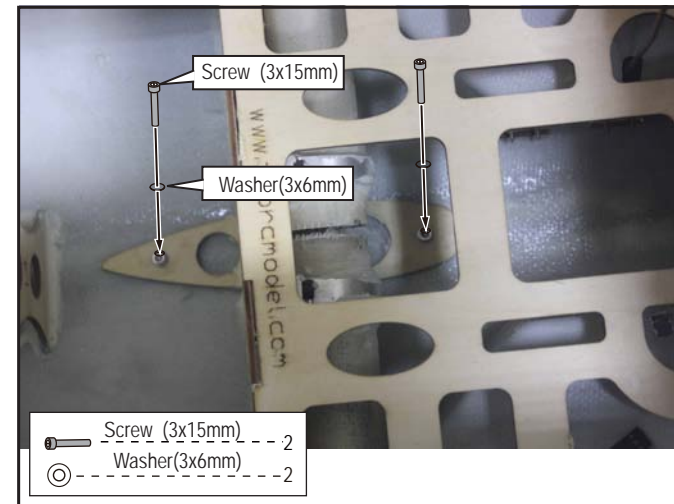


47

Step for assembling the fuel tank.



48

Mount the fuel tank, battery and receiver to the fuselage.

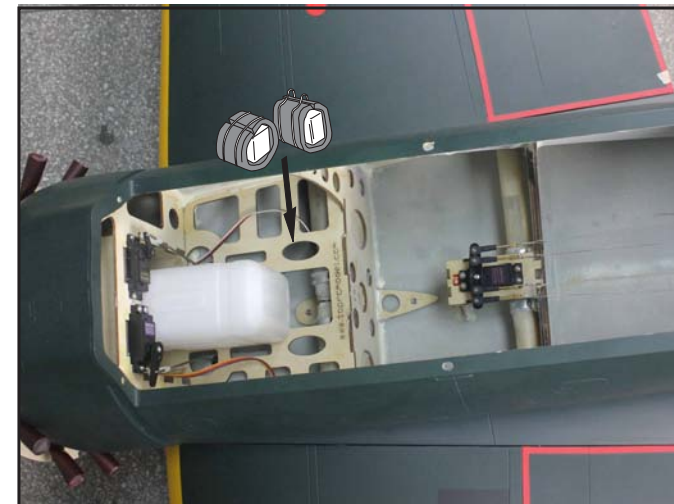

49

Step for assembling the cockpit and canopy.



Apply epoxy glue.



Apply instant glue (CA glue, super glue).



Assemble left and right sides the same way.



Ensure smooth non-binding movement while assembling.



Pay close attention here!




Cut off shaded portion.

Do not overlook this symbol!






Accessory list for the coming installation steps.

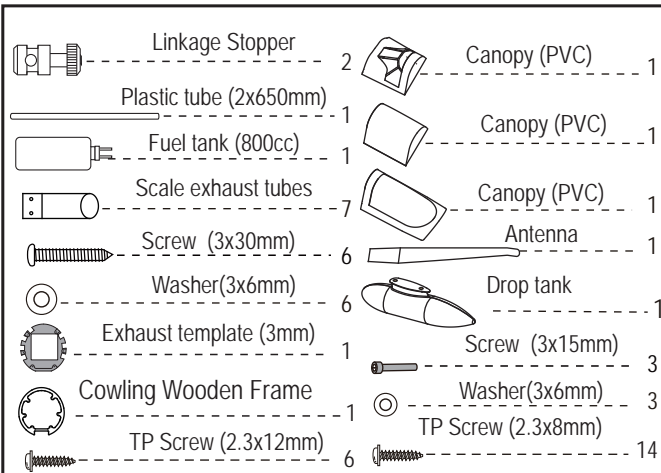

39

The side view when the engine install completion.

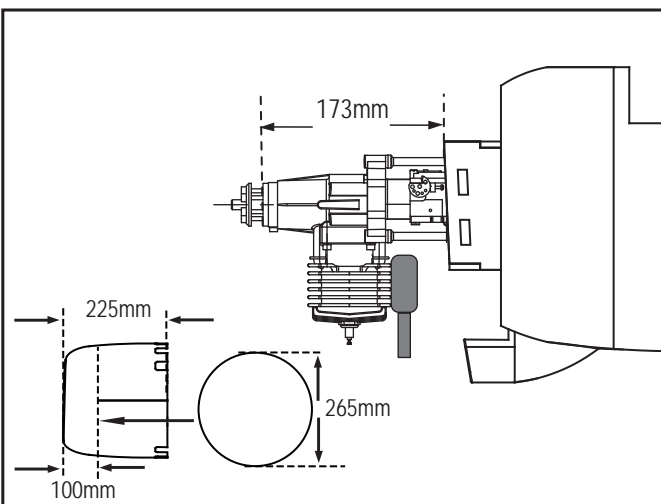

40

The picture of the cowling wooden frame to the cowling.



Apply epoxy glue.



Assemble left and right sides the same way.



Pay close attention here!



Apply instant glue (CA glue, super glue).



Ensure smooth non-binding movement while assembling.




Cut off shaded portion.

Do not overlook this symbol!




41

Put the the cowling frame and the exhaust template on the firewall place, mark the exhaust position out base on the exhaust template.

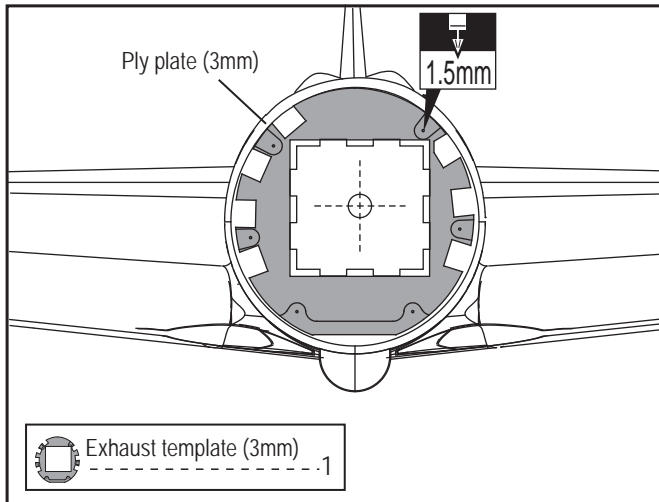


42

Install the scale exhaust tubes and the cowling wooden frame in place on the fuselage with screws, assemble the engine to the engine mount.

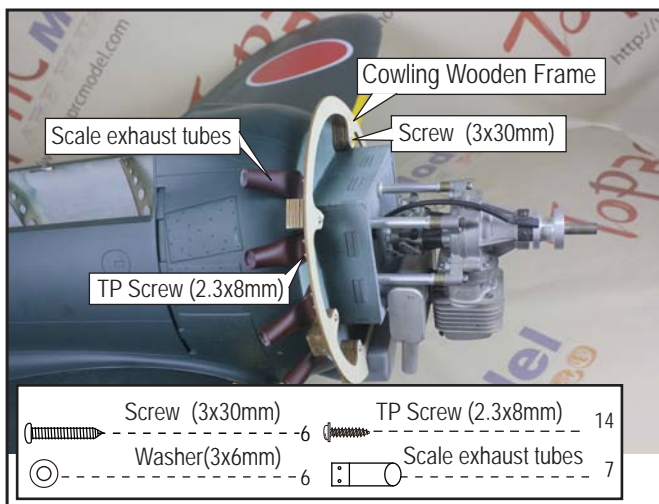

43

Fix the cowling to the cowling wooden frame with TP screws.

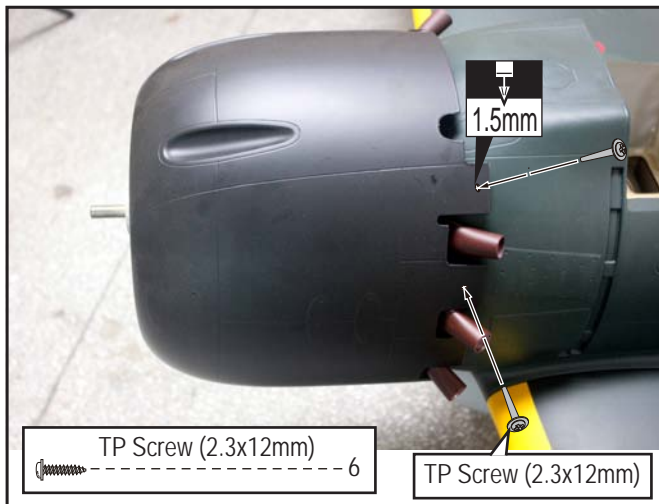

22

Measure the depth to confirm what the servo position will be as illustration.




23

Mark out the position of the elevator servo on the stabilizer.



24

Trim a slot in the stabilizer base on the mark, put the servo of elevator into the stabilizer through the hole in the wing root, install the servo to appropriate position with screws and epoxy the horn to the slot in the elevator.

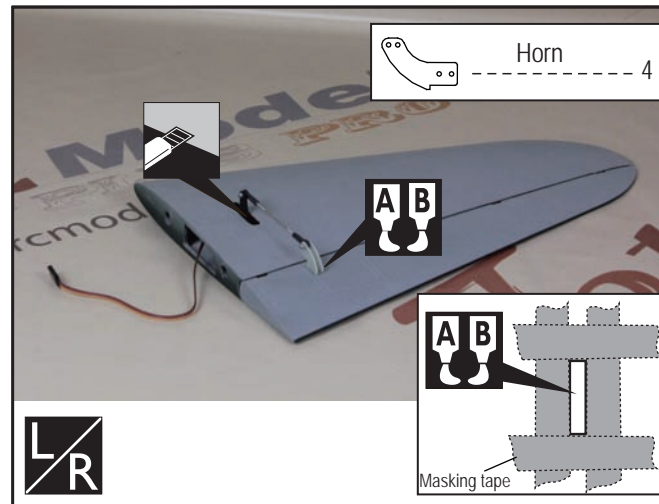

Apply epoxy glue.



Apply instant glue (CA glue, super glue).




Assemble left and right sides the same way.



Ensure smooth non-binding movement while assembling.


25

The sketch map after the stabilizer and elevator assemble completely.

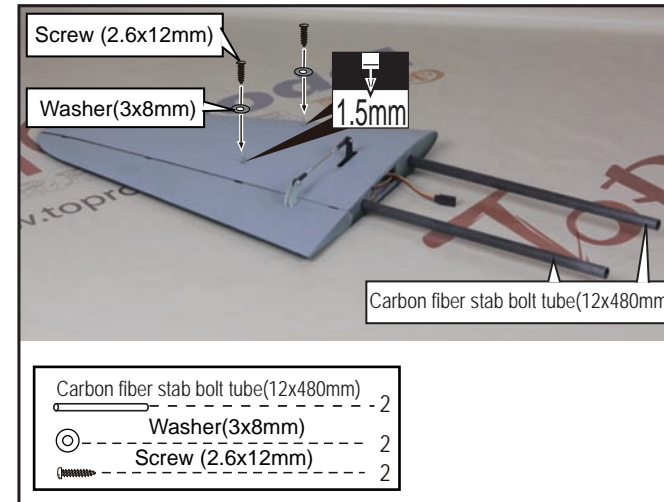


26

Assemble the fixed stabilizer to the fuselage carefully and put the other stabilizer to the fuselage through the fiber tubes, drill holes carefully to the carbon fiber tube through the holes in the stabilizer and fix the stabilizer.

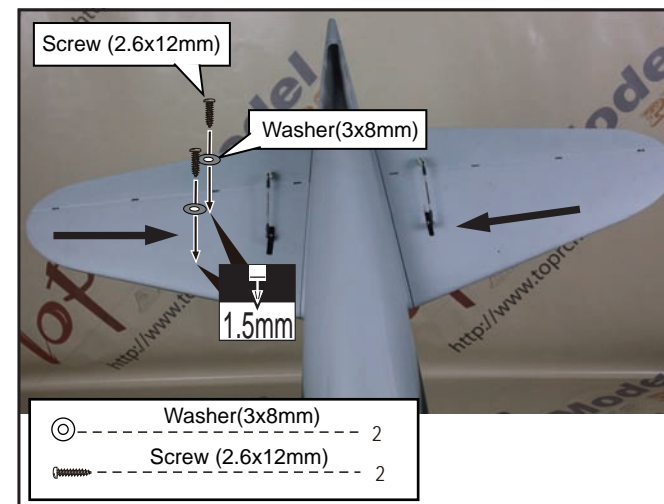

27

The sketch map after the stabilizer and elevator assemble completely.

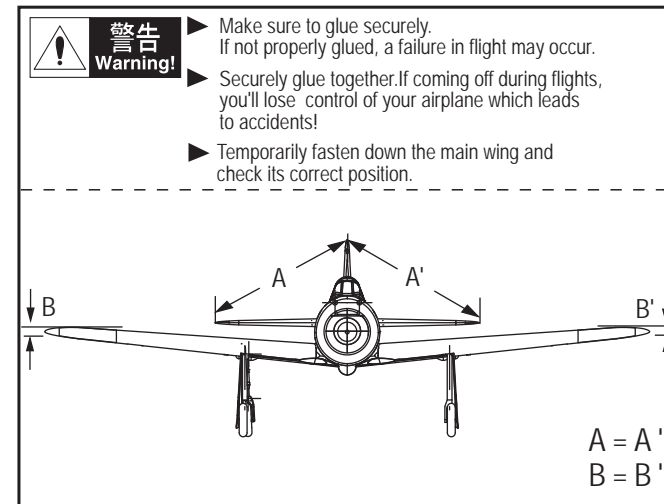



Accessory list for the coming installation steps.

<ul style="list-style-type: none"> 3 pivot & round hinge(5x68mm) 1 Retainer 5 Clevis 1 Rudder steering arm(3mm) 4 Steel wire (0.5x3000mm) 1 Ply plate (6mm) 1 Ply plate (3mm) 	<ul style="list-style-type: none"> 4 TP Screw (2.3x12mm) 6 TP Screw (2.3x8mm) 1 Rod (2x200mm) 4 Copper joiner 4 Aluminum tube(3x6mm) 5 Screw (2x10mm) 5 Nut (2mm)
--	---


30

Epoxy the rudder to the vertical fin.




28

Epoxy the pivot & round hinges to the rudder.

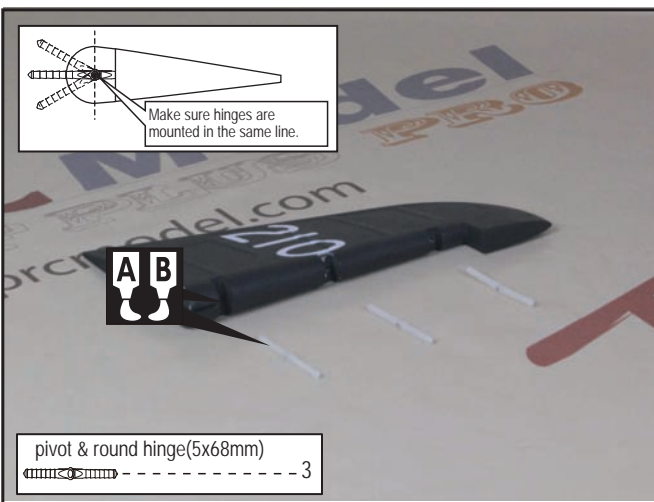


31

The sketch map of the steel wires work for the rudder.

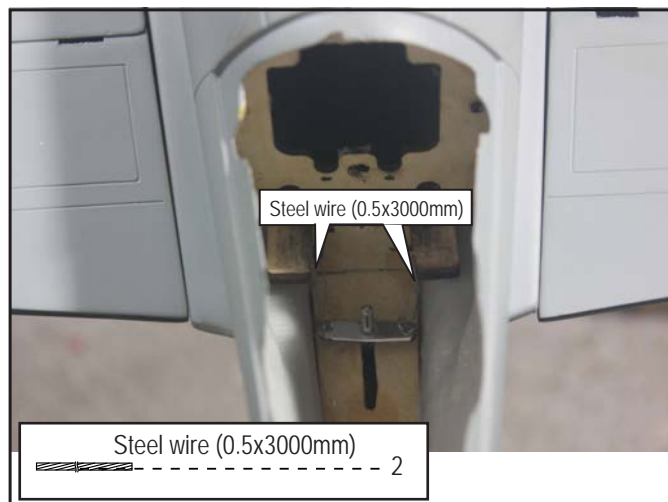


29

Assemble the rudder steering arm to the tail fuselage as illustration.

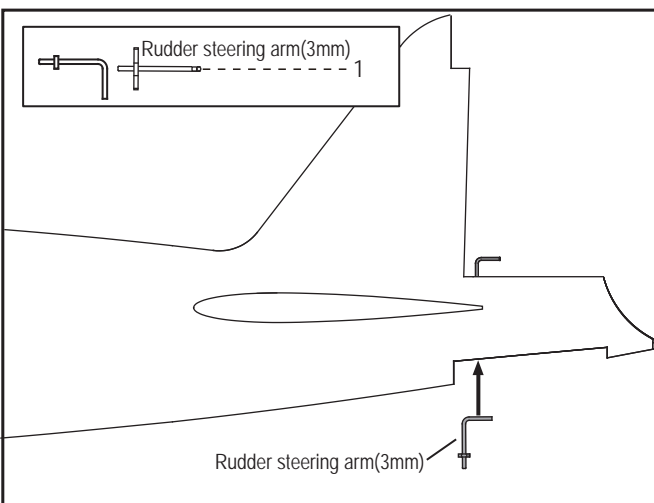


32

Epoxy the ply plate to the position to fix the rudder steering arm.

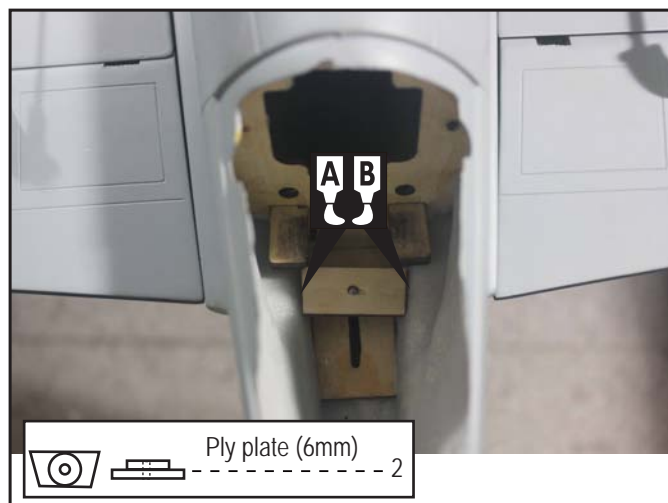


33

The picture of the tail landing gear after the servo install completion.

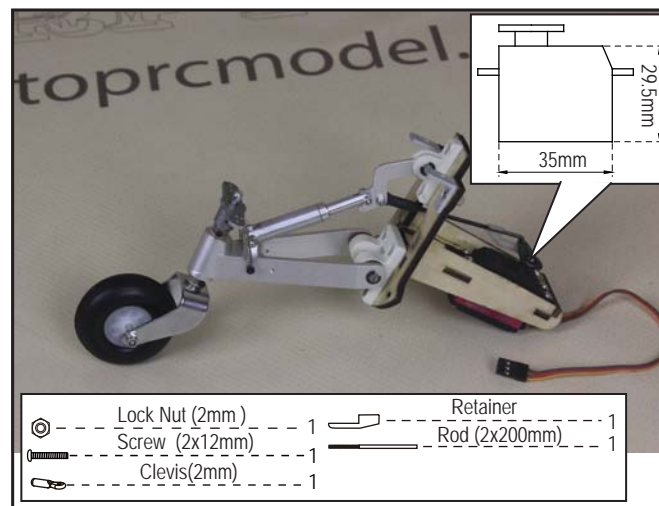


36

Connect the steel wires of the rudder horn and tail gear to the servo.

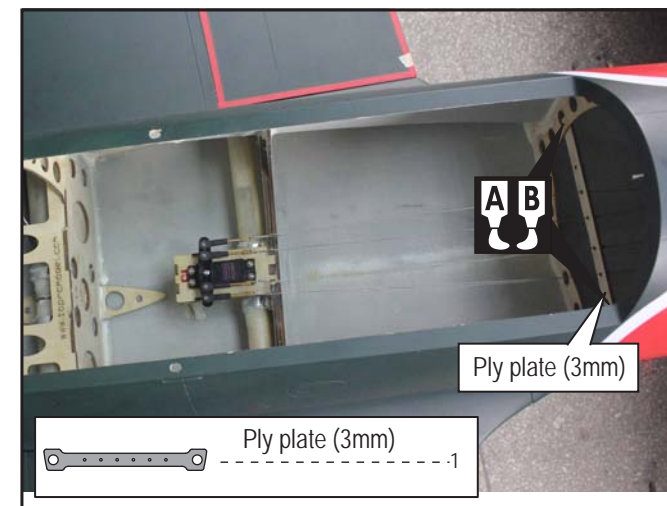

34

Assemble the tail landing gear to the fuselage as show in figure below.

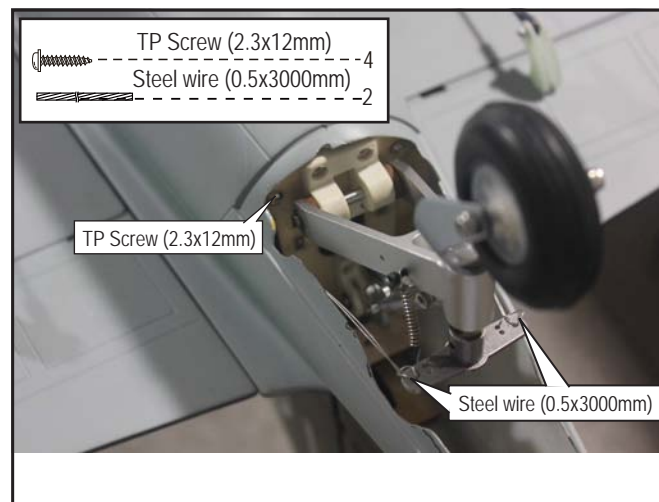


37

The picture of the tail wheel cover.




35

Install the control horn and connect the linkage of the rudder servo.

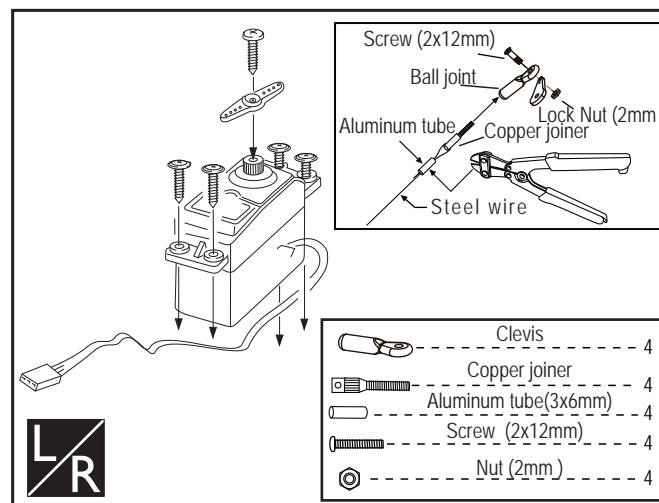

38

Assemble the tail wheel cover to the fuselage with TP screws.

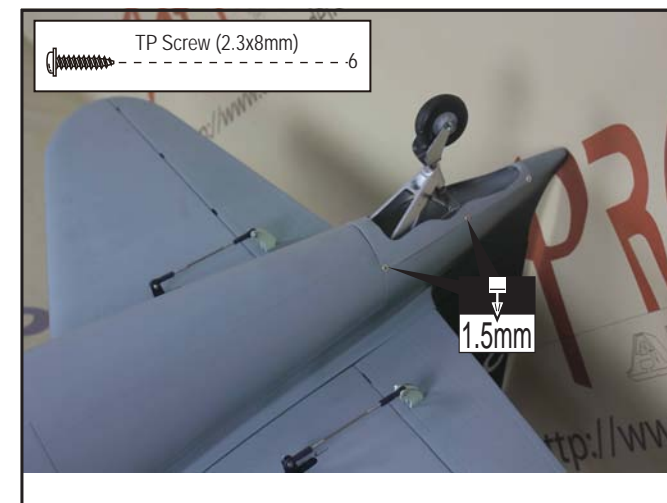

Apply epoxy glue.



Assemble left and right sides the same way.



Pay close attention here!



Apply instant glue (CA glue, super glue).



Ensure smooth non-binding movement while assembling.



Cut off shaded portion.

Do not overlook this symbol!



Apply epoxy glue.



Assemble left and right sides the same way.



Pay close attention here!



Apply instant glue (CA glue, super glue).



Ensure smooth non-binding movement while assembling.



Cut off shaded portion.

Do not overlook this symbol!

